




Faux Rock Power Supply for Dome Downlight



- ENCLOSURE FEATURES AND BENEFITS:**
- Realrock™ material provides the realistic rock features
 - Commercial grade construction stands up to elements
 - Lightweight, easy to move, and incredibly durable
 - Rocks will not fade in sun or crack in cold weather
 - Rocks designed to conceal existing utility devices

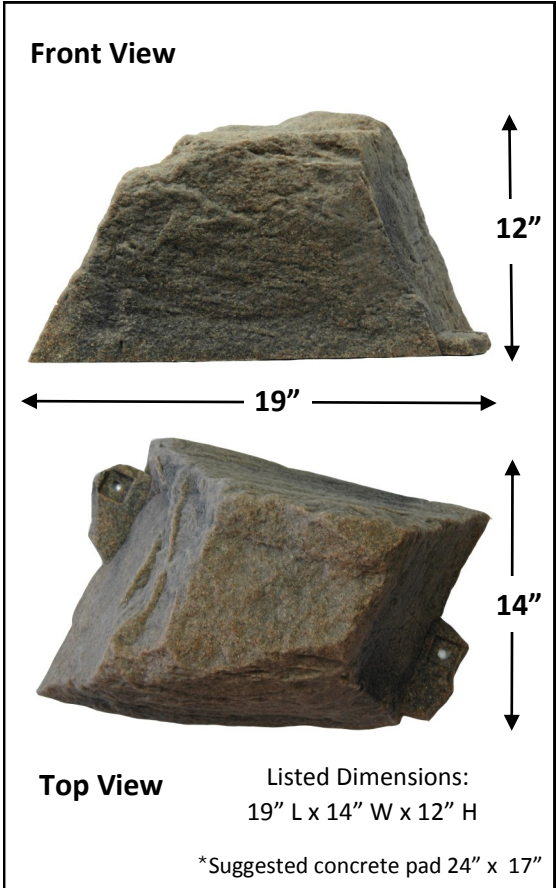

40W CONSTANT VOLTAGE + CONSTANT CURRENT LED DRIVER

LPF-40-24 is a 40W AC/DC LED driver featuring the dual modes constant voltage and constant current output. LPF-40-24 operates from 90~305VAC. Thanks to high efficiency up to 90%, with the fanless design, this driver is able to operate for -40°C ~ +80°C case temperature under free air convection.

FEATURES

- Constant Voltage + Constant Current mode output
- Plastic housing with Class II design
- Built-in active PFC function
- Class 2 power unit
- Fully encapsulated with IP67 level
- Typical lifetime > 50000 hours

Sample Interior Spacing		
Height	Length	Width
2"	11"	10"
6"	12"	4"
10"	8"	3"

Diameter Sizing	
Height	Diameter
2"	11" Dia
6"	9" Dia
9"	7" Dia



ROCK COLOR OPTIONS



Autumn Bluff



Fieldstone Gray



Riverbed Brown



Sandstone Tan

INSTALLATION INSTRUCTIONS:

1. If heat is required, installations will require GFI protected power mounted at least 6" above all water discharge ports or per local code regulations.
2. If concrete base is required. Pour concrete pad per measurements provided. If mounting to ground, level area where enclosure is to be installed.
3. If installation requires self regulated heat tape, install per instructions securing to piping and valve. Place insulated pouch over valve and piping assembly.
4. Place rock over device. Verify that rock does not interfere with device. Insert included stakes for soil installation. For concrete installations see optional concrete installation instructions.

CONCRETE ANCHOR INSTALLATIONS

1. Drill hole with same diameter as anchor of sufficient depth. Clean drilled hole of dust and debris.
2. Place washer and nut onto threaded anchor as required.
3. With nut, washer and set pin in place insert anchor through rock flange column and into concrete base.
4. Using a proper size hammer set pin with several sharp and square strikes on head of pin until pin is flush with top of threaded anchor.

